

SuperFlow Batch 4

One Size 500L

Advantages:

- Very low loading height = 1 meter
- Short process time / high capacity
- Low maintenance
- Safe operation
- Compact sanitary design
- Efficient mixing

Standard Features:

- High shear mixing
- Motor and V-belt drive
- Connections: Clamps
- CIP sprayballs
- Sack-bench

Materials:

Parts in contact with the product are made from stainless steel AISI 316L. Other parts are made from AISI 304.

Technical data:

Electricity 400 to 480 VAC, 50/60 Hz 11-30kW

Shaft seal water 10-15 l/h

Mixing unit Ø190 mm

Liquid inlet Ø63,5 mm Ø76 mm

Product outlet Ø63,5 mm Ø76 mm

Processing parameters:

Batch Size 500 Liters



Circulation up to 35.000 l/h 60.000 l/h

Viscosity app. 500 cP

Dry matter intake 60-150 kg/min

Operation Principles

Liquid recirculation through buffer tank. Dry ingredients are fed into the mixer while recirculating.

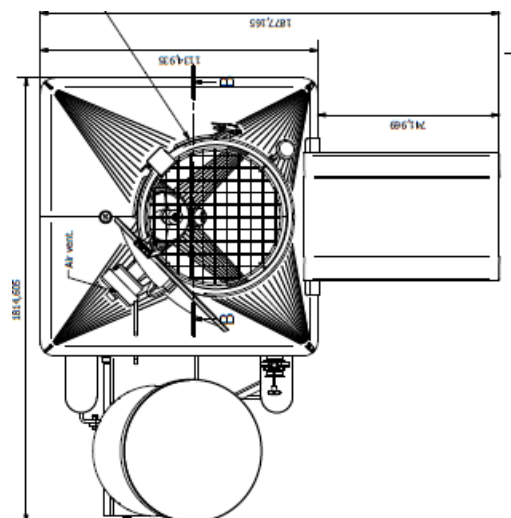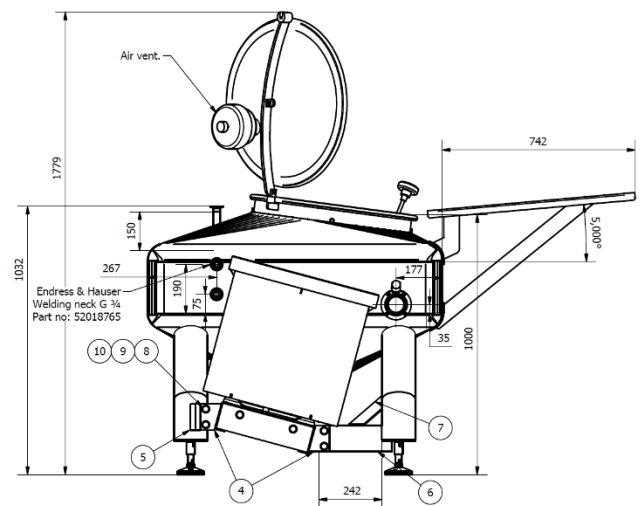

Exclusive Agent
Mobile: +66 952823935
Mail: ozzago@ozzago.com
www.ozzago.com

Empower your process

